JINRUITAI 金瑞泰科技
JINRUTAI TECHNOLOGY

Flexographic Printing Plate

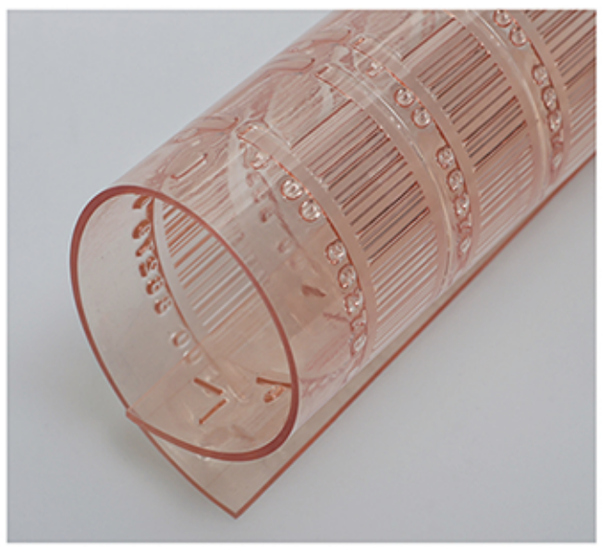

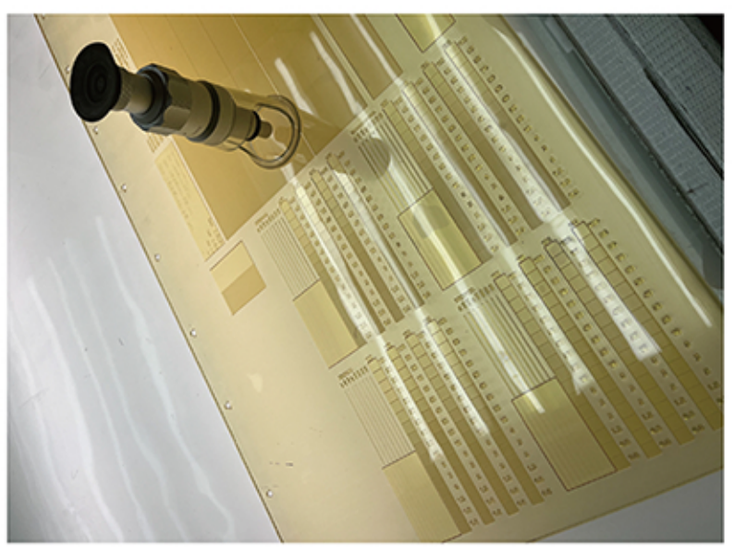

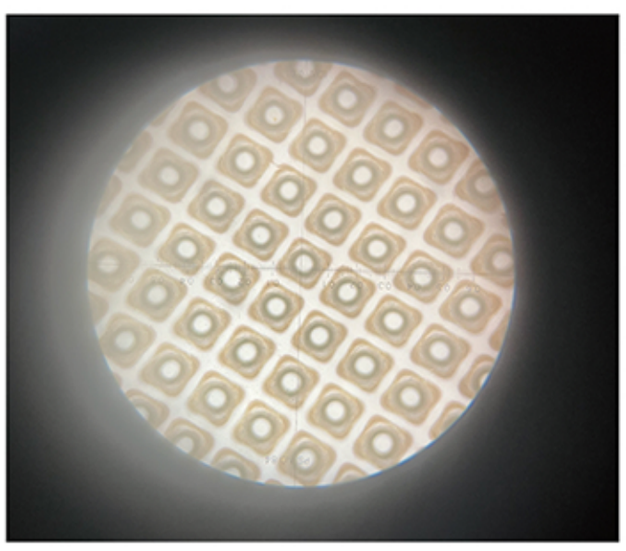

FLEXOGRAPHIC PRINTING PLATE

Type	Thickness/mm	Hardness/ShoreA	Relief Deepth/mm	Dot reproduction/%	Line/lpi	Isolated Line/Down to mm	Isolated Dot/Down to mm	Back Exposure/s Ultraviolet Rays 365nm, 16-22mw/cm²;24-30°C	Main Exposure/min Ultraviolet Rays 365nm, 16-22mw/cm²;24-30°C	Rinsing/min	Drying/h	Detackifing/min(UV-C)	Post Exposure/min(UV-C) Ultraviolet Rays 365nm, 16-22mw/cm²;24-30°C
DR635-I	6.35	36-38	2.2-3.0	3-98	85	0.3	0.5	160-320	12-24	10-12	3-4	5-8	5
DR550-I	5.50	36-38	2.0-3.0	3-98	85	0.3	0.5	100-220	12-20	9-12	3-3.5	5-8	5
DR470-I	4.70	36-38	1.8-2.4	3-98	85	0.3	5	80-200	12-20	9-12	2-3	5-8	5
DR394-I	3.94	43-45	1.8-2.0	2-98	100	0.2	0.4	35-60	12-20	5-8	1.5-2	5-8	5-8
DR318-I	3.18	40-42	0.9-1.5	2-98	100	0.175	0.25	30-60	10-20	5-7	1.5-2	5-8	5
DR284-I	2.84	46-48	1.0-1.4	2-98	120	0.175	0.25	25-40	8-20	5-7	1.5-2	5-8	5-8
DR254-II	2.54	54-56	1.0-1.2	2-98	133	0.15	0.2	25-40	8-15	5-7	1.5-2	5-8	4-6
DR228-I	2.28	56-58	1.0-1.2	2-98	133	0.15	0.2	35-55	8-20	5-7	1.5-2	5-8	4-6
DR170-I	1.70	62-64	0.7-0.9	1-98	150	0.1	0.2	25-40	10-18	5-7	1.5-2	5-8	4-6
DR114-II	1.14	74-76	0.6-0.7	1-98	150	0.1	0.2	35-70	10-18	5-7	1.5-2	5-8	4-6
DM116	1.16	76-78	0.86	2-95	120	0.1	0.2	/	10-15	5-7	1.5-2	5-8	5